

PRODUCT DATASHEET

SP ADJ P 8W 930 PS DIM IP20 SI

SPOT ADJUST | Recessed mounted spotlight for indoor use, adjustable



Areas of application

- Direct replacement for recessed spotlights with halogen lamps
- General illumination
- Hotel rooms and corridors
- Bars, restaurants
- Accent lighting
- Galleries, museums
- Residential interiors

Product benefits

- Energy savings of up to 90 % compared to halogen lamp spotlights
- Powerselect: Brightness adjustment via dip switches on the driver
- Easy replacement of external driver thanks to plug with bayonet lock
- Easy installation and electrical connection thanks to tool-free electrical connectors
- SCALE Design – great appearance, valuable materials and small size fits into every surrounding

Product features

- Available for ceiling cut-out diameters of 68 mm and 83 mm
- Adjustable swivel angle: $\pm 25^\circ$
- Color rendering index R_a : 90
- Beam angle: 36°
- Die-cast aluminum housing
- Silicon-pad protected springs
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Through-wiring possible




TECHNICAL DATA

Electrical data


Nominal wattage	8 W / 6 W / 4 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	38.000 mA
Inrush current	2 A
Inrush current time T_{h50}	60 μ s
Max. number of luminaires per miniature circuit breaker B16	336
Max. number of luminaires per miniature circuit breaker C10	210
Max. number of luminaires per miniature circuit breaker C16	336
Power factor λ	0.90
Total harmonic distortion	< 20 %
Protection class	II
Operating mode	Electronic control gear (ECG)
Dimming interface	Phase Cut

Photometrical data

Luminous flux	680 lm / 540 lm / 340 lm
Luminous efficacy	85 lm/W
Color temperature	3000 K
Light color (designation)	Warm white
Color rendering index Ra	90
Standard deviation of color matching	≤ 3 sdcn
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Beam angle	36 °

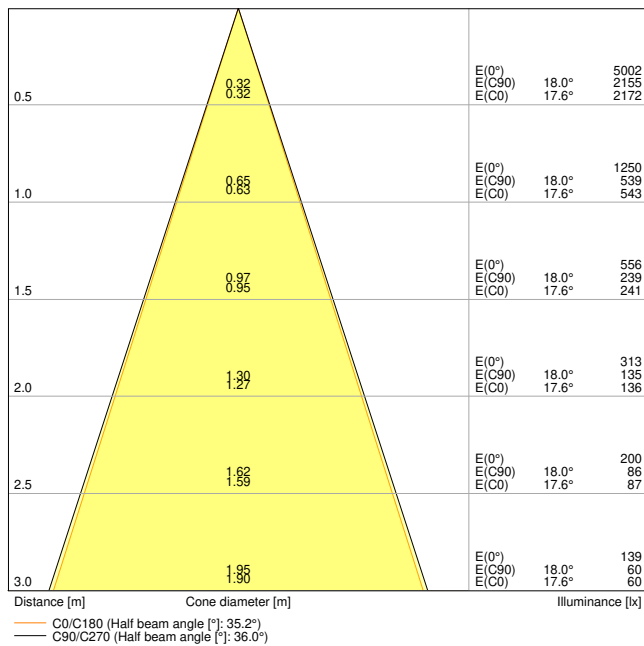


SP ADJ P 8W 930 PS DIM IP20 SI

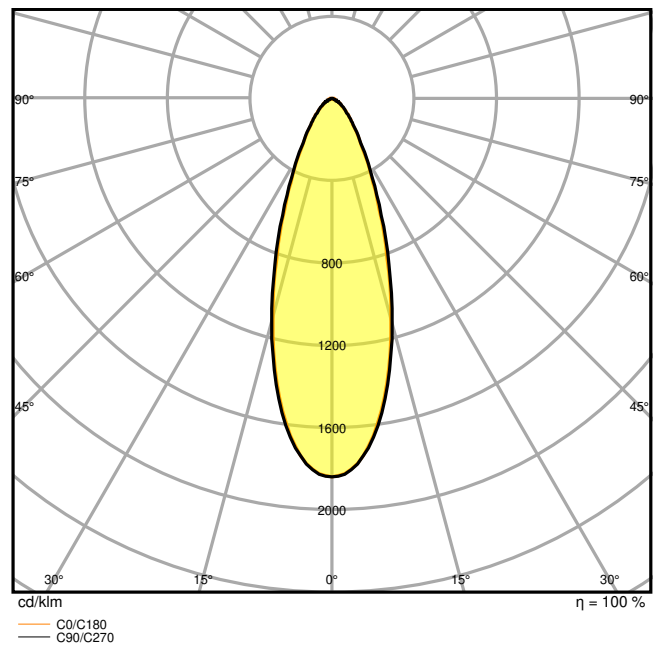

SP ADJ P 8W 930 PS DIM IP20 SI

Dimensions & Weight

Diameter	81.00 mm
Height	43.00 mm
Product weight	220.00 g



SP ADJ P 8W PS DIM IP20

Materials & Colors

Product color	Silver
Housing color	Silver
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C

Mercury content	0.0 mg
-----------------	--------

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-42...+80 °C
Type of connection	Push terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Type of dimming	PHASE CUT
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	68 mm
Mounting depth	50,0 mm
Adjustable	Yes
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	41000 h ¹⁾
Lifespan L80/B50 at 25 °C	41000 h
Lifespan L90/B10 at 25 °C	18000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	180 mA
ECG - Output ripple current	< 5 %
ECG - Length	68.00 mm
ECG - Width	55,0 mm
ECG - Height	22,0 mm

Certificates & Standards









Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No


Ball shot safe	No
EPD	LEDV-00014-V01.01-EN
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	SPOT FRAME 100X200 2X D68 BK	4099854460081
	SPOT FRAME 100X200 2X D68 WT	4099854460029
	SPOT FRAME 100X300 3X D68 WT	4099854460203
	SPOT FRAME 100X200 2X D68 SI	4099854460111
	SPOT FRAME 100X300 3X D68 BK	4099854460258
	SPOT FRAME 100X100 1X D68 SI	4099854459962
	SPOT FRAME 100X300 3X D68 SI	4099854460289
	SPOT FRAME 100X100 1X D68 WT	4099854459863

Product image	Product name	EAN
	SPOT FRAME 100X100 1X D68 BK	4099854459917
	SP RING D100 BK	4099854136542
	SP RING D100 WT	4099854136511
	SP DRIVER DALI 8W	4099854089558
	SP RING D180 WT	4099854013416
	CONNECTOR BOX 3POLE L/N/E	4099854013508
	SP HOLDER DN68 H65	4099854013478
	SP RING D180 BK	4099854013447
	SP RING D133 BK	4099854013386
	SP RING D133 WT	4099854013355

EQUIPMENT / ACCESSORIES













- External control gear included with dip-switches to select power during installation








- Refurbishment rings are available as accessory
- Selected DALI 2.0 driver available as accessory

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI SP FIX P and SP FIX ADJ
	Addon technical information	Dimmerlist SPOT GEN2
	Legal information	Light source Insert SP FIX P PS DIM IP44
	Legal information	Legal Insert
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	CE Declaration of Conformity SPOT DIM
	Declarations of conformity UKCA	UKCA Declaration of Conformity SPOT DIM
	Declarations of conformity UKCA	SP DIM
	Certificates	SP GEN2
Photometric and lighting design files		Document name
	IES file (IES)	SP ADJ P 8W 930 PS DIM IP20 SI
	LDT file (Eulumdat)	SP ADJ P 8W 930 PS DIM IP20 SI
	ULD file (DIALux)	SP ADJ P 8W 930 PS DIM


Photometric and lighting design files		Document name
	ROLF file (RELUX)	SP ADJ P 8W 930 PS DIM
	UGR file (UGR table)	SP ADJ P 8W 930 PS DIM IP20 SI
	Light distribution curve type cone	SP ADJ P 8W 930 PS DIM IP20 SI
	Light distribution curve type polar	SP ADJ P 8W 930 PS DIM IP20 SI
CAD/BIM files		Document name
	BIM Revit 3D	SP ADJ G2
	CAD STEP 3D	SP ADJ
Tender texts		Document name
	Tender documents	SPOT ADJUST 8W 930 PS DIM IP20 SI-EN





LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075799707	Folding box 1	100 mm x 105 mm x 85 mm	390.00 g	0.89 dm ³
4058075799714	Shipping box 20	562 mm x 230 mm x 195 mm	8570.00 g	25.21 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Preset			
				
Current (CC)	85mA	140mA	180mA	140mA
Power	4W	6W	8W	6W
% rated lumen	50%	80%	100%	80%

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.